Category **Loudspeakers**

Code **C550-T**

Range **Aluminium columns**



Description

50 W Sound Column


Column-type speaker unit made of grey extruded aluminium with hermetically sealed ends made of shockproof material. Made up of 2 wideband loudspeakers with 1 tweeter with transformer for 50 W constant-voltage lines (attenuation is possible). Two fixed brackets make it easy to secure it to a wall. If necessary in relation to the environment in which the sound is to be broadcast, it is possible, using a specific accessory, to place several columns one on top of the other in order to increase the depth of reach of the speaker units.

Technical data


Rated output power	50 W
Adjustable output power	50 - 25 - 12,5 W
Line voltage	25 - 50 - 70 - 100 V
Frequency response	100 ÷ 20.000 Hz
Efficiency (1W/1m)	93 dB
Acoustic pressure (Pnom/1m)	108 dB
Horizontal dispersion angle (2 kHz)	120°
Vertical dispersion angle (2 kHz)	40°
Dimensions (W x H x D)	166 x 408 x 121 mm
Weight	4,5 kg

Polar diagrams (2 kHz)

• Horizontal curve •

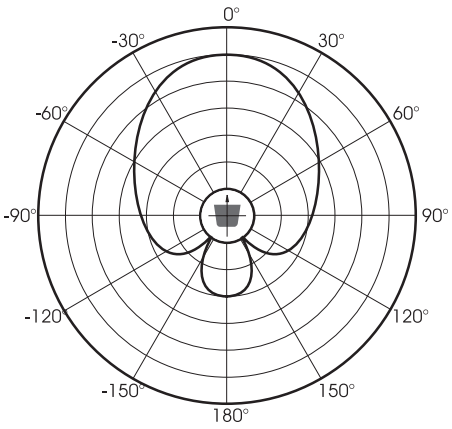

• Vertical curve •

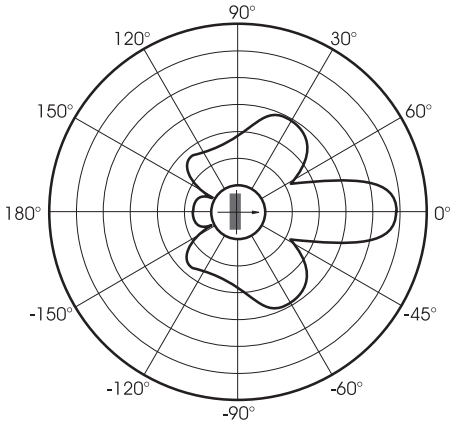

PASO S.p.A. reserve the right to make changes to the drawings and specifications at any time and without notice.