Category

Loudspeakers

Code

C450-TW

Range

Aluminium columns



Description

50 W Waterproof Sound Column


Column-type speaker unit made of pale grey extruded aluminium with hermetically sealed ends made of shockproof material. Made up of 4 wide-band loudspeakers and 1 tweeter transformer for 50 W constant-voltage lines (attenuation is possible).
A swivelling support, running along the rear guides of the speaker unit, makes it easy to fix it to a wall.
Class of protection IP66.

Technical data


Rated output power	50 W
Adjustable output power	50 - 25 - 12,5 W
No. of loudspeakers	4 + 1 tweeter
Line voltage	50 - 70 - 100 V
Frequency response	120 ÷ 15.000 Hz
Efficiency (1W/1m)	92 dB
Acoustic pressure (Pnom/1m)	109 dB
Horizontal dispersion angle (2 kHz)	160°
Vertical dispersion angle (2 kHz)	30°
Dimensions (W x H x D)	95 x 520 x 80 mm
Weight	2,3 kg

Polar diagrams (2 kHz)


• Horizontal curve •

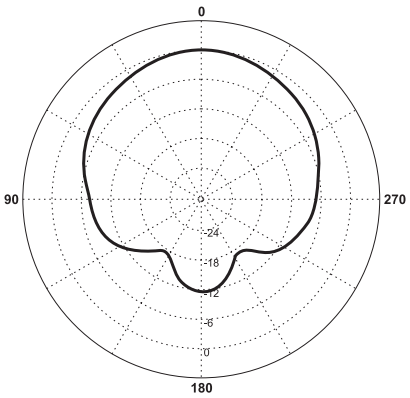

• Vertical curve •

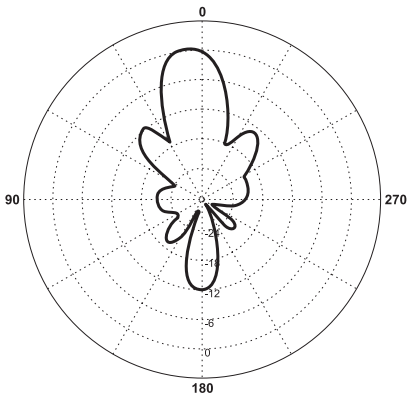

Frequency response

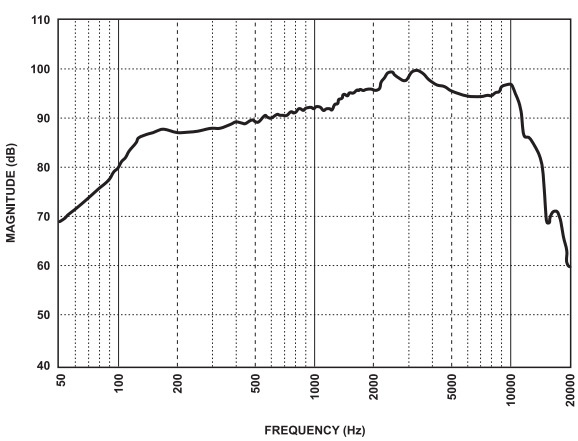

PASO S.p.A. reserve the right to make changes to the drawings and specifications at any time and without notice.