Category


Loudspeakers

Code

C67/6-T

Range

Ceiling-mounting Loudspeakers



Description

6 W Ceiling Loudspeaker (Ø 197 mm)

Circular ceiling loudspeaker for false ceiling consisting of a metal structure that can be secured to a false ceiling or to a panel by means of screws or special spring-type supports. The metal grilles to be hooked onto the structure with a snap-on device are available separately and can be chosen on the basis of aesthetic requirements. Connection to constant-voltage lines through a line transformer.



• Mod. MOON •



• Mod. DAISY •




• Mod. WAVE •


Technical data

Rated output power	6 W
Adjustable output power	6 - 3 - 1,5 W
Line voltage	50 - 70 - 100 V
Frequency response	100 ÷ 12.000 Hz
Efficiency (1W/1m)	92 dB
Acoustic pressure (Pnom/1m)	99 dB
Dispersion angle (2 kHz)	120°
Diameter of installation hole	140 mm
Dimensions (Ø x H)	197 x 95 mm
Weight	0,9 kg

Polar diagram (2kHz)

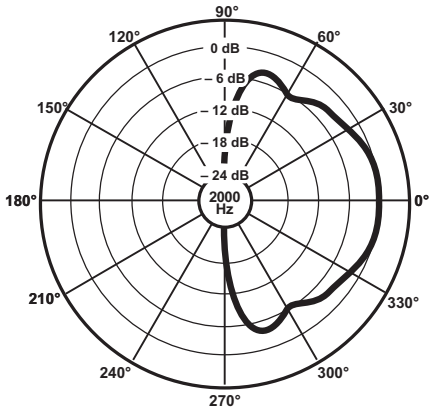

Frequency response

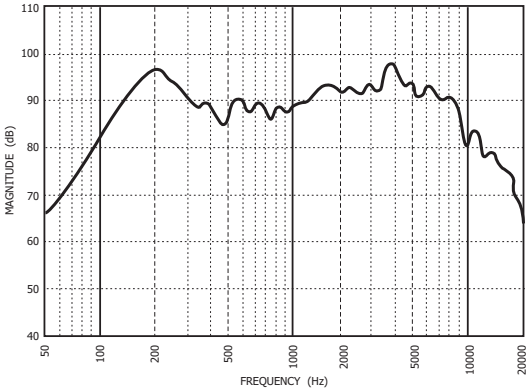

PASO S.p.A. reserve the right to make changes to the drawings and specifications at any time and without notice.