Category **Loudspeakers**

Code **C68/6-T**

Range **Ceiling-mounting Loudspeakers**



Description

6 W Ceiling Loudspeaker (Ø 237 mm)
Circular ceiling loudspeaker for false ceiling consisting of a metal structure that can be secured to a false ceiling or to a panel by means of screws or special spring-type supports. The metal grilles to be hooked onto the structure with a snap-on device are available separately and can be chosen on the basis of aesthetic requirements. Connection to constant-voltage lines through a line transformer.



• Mod. MOON •



• Mod. DAISY •




• Mod. WAVE •


Technical data

Rated output power	6 W
Adjustable output power	6 - 3 - 1,5 W
Line voltage	50 - 70 - 100 V
Frequency response	90 ÷ 15.000 Hz
Efficiency (1W/1m)	94 dB
Acoustic pressure (Pnom/1m)	101 dB
Dispersion angle (2 kHz)	100°
Diameter of installation hole	180 mm
Dimensions (Ø x H)	237 x 68 mm
Weight	1,2 kg

Polar diagram (2kHz)

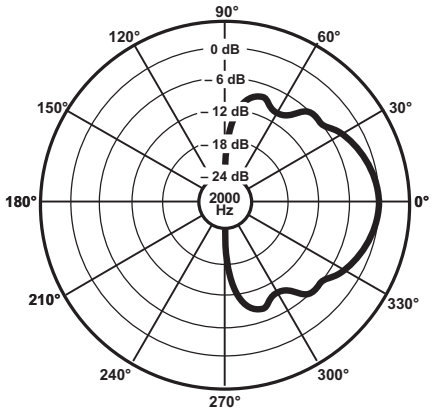

Frequency response

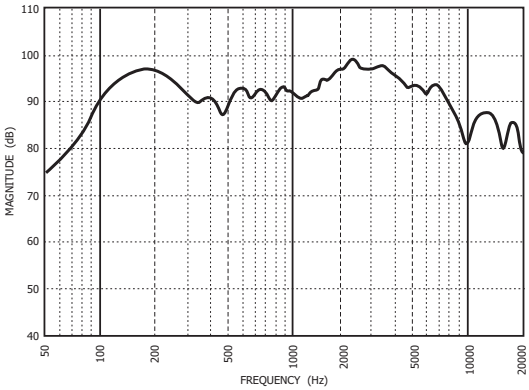

PASO S.p.A. reserve the right to make changes to the drawings and specifications at any time and without notice.