Category

Loudspeakers

Code

C430-T

Range

Aluminium columns

Description

30 W Sound Column

Column-type speaker unit made of pale grey extruded aluminium with hermetically sealed ends made of shockproof material. Made up of 6 wide-band loudspeakers and 1 tweeter, with transformer for 30 W constant-voltage lines (attenuation is possible). A swivelling support, running along the rear guides of the speaker unit, makes it easy to fix it to a wall.




Technical data


Rated output power	30 W
Adjustable output power	30 - 15 - 7,5 W
No. of loudspeakers	6 + 1 tweeter
Line voltage	50 - 70 - 100 V
Frequency response	180 ÷ 16.000 Hz
Efficiency (1W/1m)	95 dB
Acoustic pressure (Pnom/1m)	110 dB
Horizontal dispersion angle (2 kHz)	160°
Vertical dispersion angle (2 kHz)	20°
Dimensions (W x H x D)	95 x 725 x 80 mm
Weight	4,8 kg

Polar diagrams (2 kHz)


• Horizontal curve •

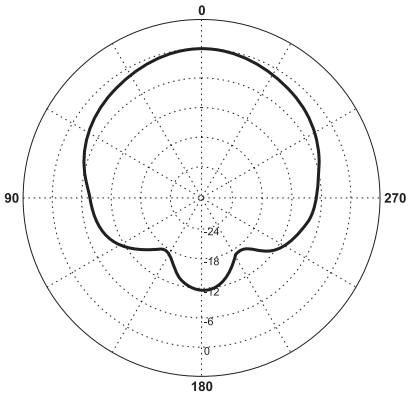

• Vertical curve •

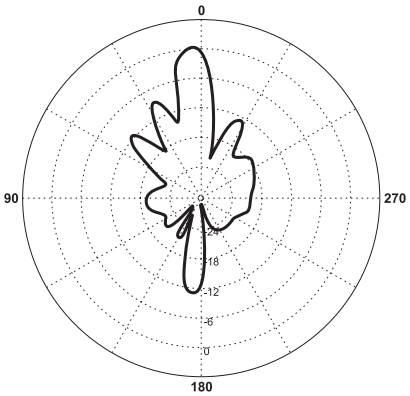

Frequency response

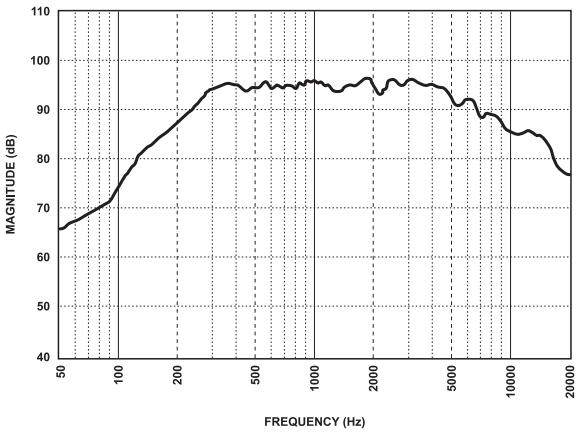

PASO S.p.A. reserve the right to make changes to the drawings and specifications at any time and without notice.