Category **Loudspeakers**

Code **C44/6-TB**

Range **Flush-mounting Loudspeakers**



Description


6 W Loudspeaker

Indoor speaker unit for flush mounting, ideal both for background music and for speech. Installation on a wall is made easier by the use of a special box for flush-mounting. The speaker unit is made of white UV-stabilised self-extinguishing plastic material with a metal grille on the front. Line transformer for constant-voltage variable-output systems.


Technical data

Rated output power	6 W
Adjustable output power	6 - 3 - 1,5 W
Line voltage	50 - 70 - 100 V
Frequency response	150 ÷ 13.000 Hz
Efficiency (1W/1m)	90 dB
Acoustic pressure (Pnom/1m)	97 dB
Dispersion angle (2 kHz)	120°
Dimensions (W x H x D)	165 x 280 x 70 mm
Weight	0,83 kg

Polar diagram (2 kHz)

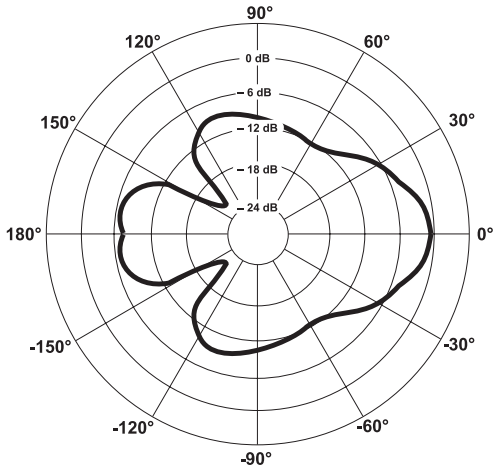

Frequency response

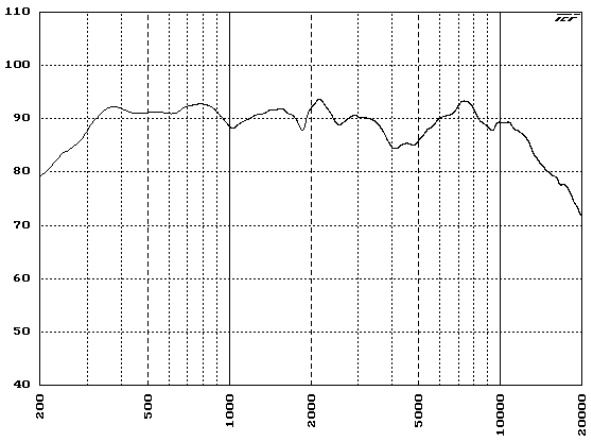

PASO S.p.A. reserve the right to make changes to the drawings and specifications at any time and without notice.

Category **Loudspeakers**

Code **C44/20-B**

Range **Flush-mounting Loudspeakers**



Description

20 W Loudspeaker

Indoor speaker unit for flush mounting, ideal both for background music and for speech. Installation on a wall is made easier by the use of a special box for flush-mounting. The speaker unit is made of white UV-stabilised self-extinguishing plastic material with a metal grille on the front. Dual-cone wideband loudspeaker (Ø 130 mm).

Technical data

Rated output power	20 W
Adjustable output power	-
Impedance	8 Ω
Frequency response	100 ÷ 15.000 Hz
Efficiency (1W/1m)	90 dB
Pressione acustica (Pnom/1m)	103 dB
Acoustic pressure (2 kHz)	120°
Dimensions (W x H x D)	165 x 280 x 70 mm
Weight	0,88 kg

PASO S.p.A. reserve the right to make changes to the drawings and specifications at any time and without notice.

Category **Loudspeakers**

Code **C44/20-TB**

Range **Flush-mounting Loudspeakers**



Description


20 W Loudspeaker

Indoor speaker unit for flush mounting, ideal both for background music and for speech. Installation on a wall is made easier by the use of a special box for flush-mounting. The speaker unit is made of white UV-stabilised self-extinguishing plastic material with a metal grille on the front. Dual-cone wideband loudspeaker (Ø 130 mm). Line transformer for constant-voltage variable-output systems.


Technical data

Rated output power	20 W
Adjustable output power	20 - 10 - 5 - 2,5 W
Line voltage	50 - 70 - 100 V
Frequency response	100 ÷ 15.000 Hz
Efficiency (1W/1m)	90 dB
Acoustic pressure (Pnom/1m)	103 dB
Dispersion angle (2 kHz)	120°
Dimensions (W x H x D)	165 x 280 x 70 mm
Weight	1,38 kg

Polar diagram (2 kHz)

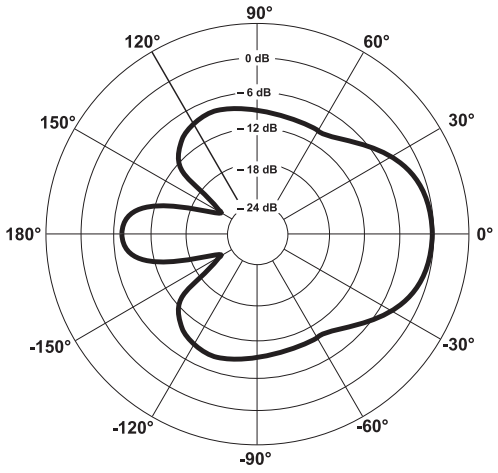

Frequency response

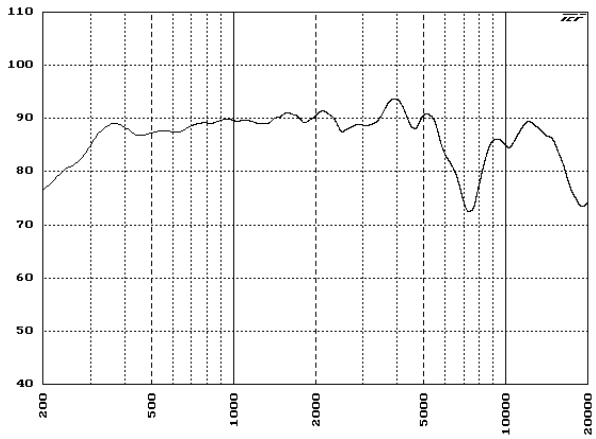

PASO S.p.A. reserve the right to make changes to the drawings and specifications at any time and without notice.