Category **Loudspeakers**

Code **C58/6-TB**

Range **Ceiling-mounting Loudspeakers**



Description


6 W Ceiling Loudspeaker

Circular ceiling loudspeaker for false ceilings made of moulded sheet metal, treated with white scratchproof non-reflecting paint. It consists of a supporting ring with spring-type quick-fitting hooks for easy securing to the ceiling. The central mask with the loudspeaker wired to the line transformer fits into the ring by rotating it into place, making connection and installation easy. Connection to constant-voltage lines through a line transformer.

Technical data

Rated output power	6 W
Adjustable output power	6 - 3 - 1,5 W
Line voltage	50 - 70 - 100 V
Frequency response	80 ÷ 20.000 Hz
Efficiency (1W/1m)	95 dB
Acoustic pressure (Pnom/1m)	103 dB
Dispersion angle (2 kHz)	130°
Diameter of installation hole	200 ÷ 205 mm
Dimensions (Ø x H)	220 x 95 mm
Weight	1,3 kg

Connections

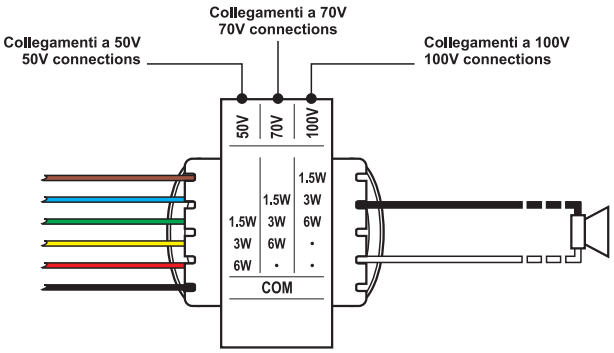

PASO S.p.A. reserve the right to make changes to the drawings and specifications at any time and without notice.