Category **Loudspeakers**

Code **C624-T**

Range **Wooden columns**



Description

24 W Sound Column


Column-type speaker unit of particular prestige walnut heartwood Made up of 6 loudspeakers with transformer for 24 W constant-voltag lines (attenuation is possible). Switch for including the 'Speecl Enhancer' filter, capable of improving the intelligibility of speech i particularly critical acoustic conditions. A jointed support makes it eas to fix it to a wall.

Technical data


Rated output power	24 W
Adjustable output power	24 - 12 - 6 W
Line voltage	25 - 50 - 70 - 100 V
Frequency response	150 ÷ 15.000 Hz
Frequency response with filter enabled	250 ÷ 15.000 Hz
Efficiency (1W/1m)	93 dB
Acoustic pressure (Pnom/1m)	106 dB
Horizontal dispersion angle (2 kHz)	210°
Vertical dispersion angle (2 kHz)	20°
Dimensions (W x H x D)	140 x 870 x 100 mm
Weight	6,3 kg

Polar diagrams (2 kHz)

• Horizontal curve •

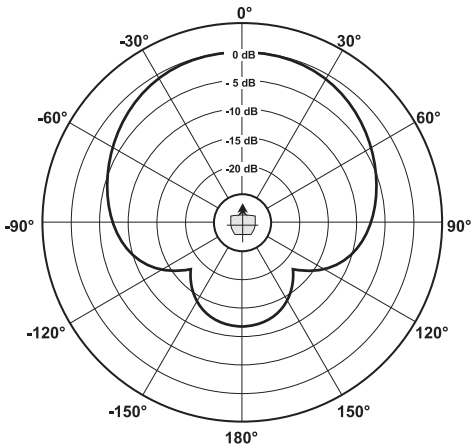

• Vertical curve •

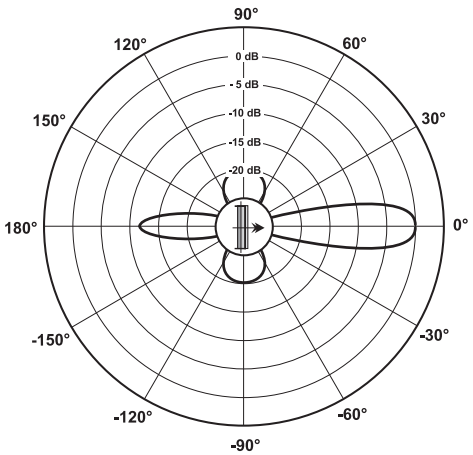

PASO S.p.A. reserve the right to make changes to the drawings and specifications at any time and without notice.