Category

Loudspeakers

Code

C420-T

Range

Aluminium columns



Description

20 W Sound Column


Column-type speaker unit made of pale grey extruded aluminium with hermetically sealed ends made of shockproof material. Made up of 4 wide-band loudspeakers and 1 tweeter, with transformer for 20 W constant-voltage lines (attenuation is possible).
A swivelling support, running along the rear guides of the speaker unit, makes it easy to fix it to a wall.

Technical data


Rated output power	16 W
Adjustable output power	16 - 8 - 4 W
Line voltage	25 - 35 - 50 - 70 - 100 V
Frequency response	170 ÷ 15.000 Hz
Frequency response with filter enabled	250 ÷ 15.000 Hz
Efficiency (1W/1m)	92 dB
Acoustic pressure (Pnom/1m)	104 dB
Horizontal dispersion angle (2 kHz)	210°
Vertical dispersion angle (2 kHz)	40°
Dimensions (W x H x D)	95 x 460 x 80 mm
Weight	3,2 kg


Polar diagrams (2 kHz)

• Horizontal curve •

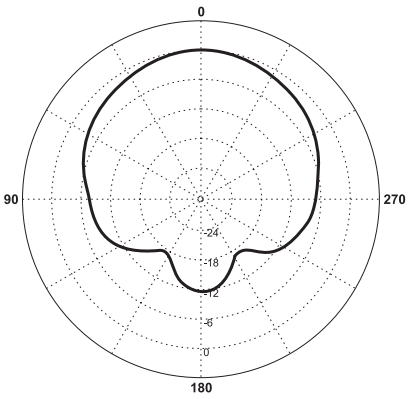

• Vertical curve •

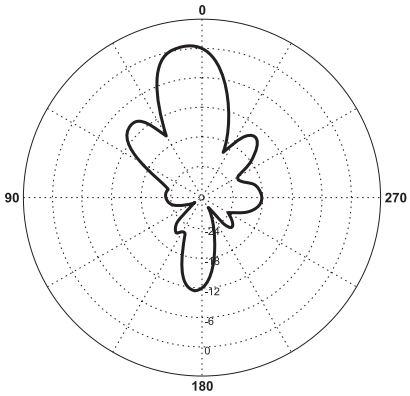

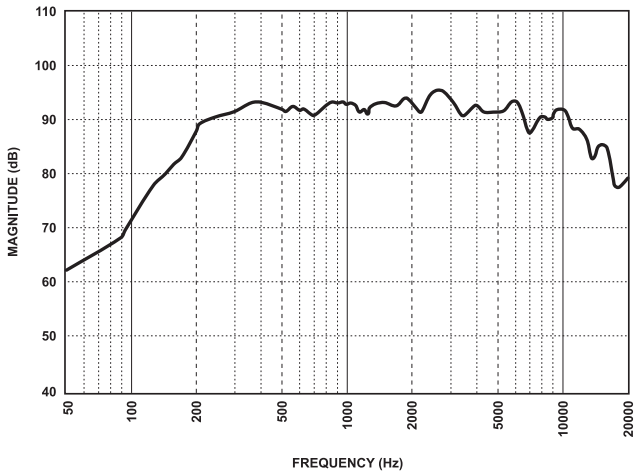

PASO S.p.A. reserve the right to make changes to the drawings and specifications at any time and without notice.