Category **Loudspeakers**

Code **C48/6-2T**

Range **Sound projectors**



Description

6+6 W Two-directional Sound Projector


Two-directional sound projector made of white UV-stabilised ABS. Supplied with a swivelling bracket for securing it easily to a wall or the ceiling. The class of mechanical protection of the speaker unit is IP44, for indoor use. It is equipped with two opposed loudspeakers and is particularly suitable for sound broadcasting in long and narrow areas such as corridors.

Technical data

Rated output power	12 W (6+6 W)
Adjustable output power	12 - 6 - 3 W
Line voltage	50 - 70 - 100 V
Frequency response	170 ÷ 12.000 Hz
Efficiency (1W/1m)	88 dB(*)
Acoustic pressure (Pnom/1m)	96 dB(*)
Dispersion angle (2 kHz)	140°(*)
Weight	2 kg

(*) Measurement referred to a single direction of emission from the speaker unit.

Layout dimensions

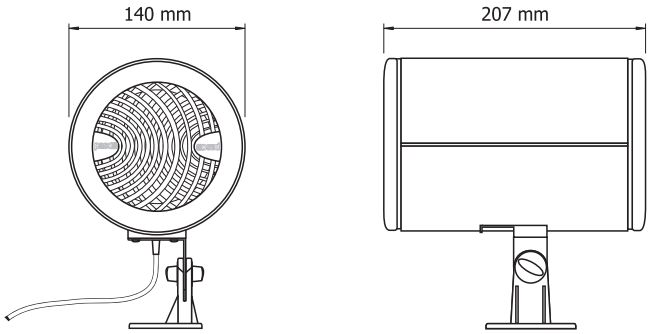

PASO S.p.A. reserve the right to make changes to the drawings and specifications at any time and without notice.